


CamCarb Cylinder SMH Glide/Pack®

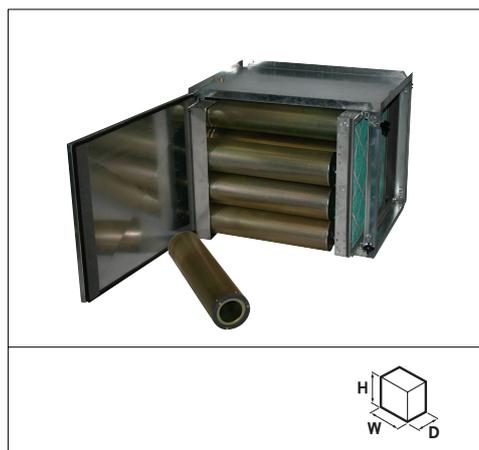

Advantages

- Combines high capacity sorbent canisters with side-access housings for low bypass large system gaseous contaminant control
- Side-access housing integrity with dual access doors may be up to four filters high by six filters wide

Typical applications: HVAC system installation in commercial, industrial, manufacturing and medical facilities.

Construction: 16-gauge aluminized steel, gasketed dual access doors, anodized aluminum filter tracks for 2" deep prefilters and separate track for CamCarb Cylinders. Consult factory for stacking and reinforcement guidelines.

Filters: Accepts 2" deep particle prefilter and 16 CamCarb Cylinders per 24" by 24" opening.
Additional data: Out-turned pre-drilled standing flanges mate to other HVAC equipment.

See Literature 2118 for more details.

Dimensions and Airflow Capacity (cfm)

Number of Filters High	Height (inches)	½ Filter Wide	1 Filter Wide	1-½ Filters Wide	2 Filters Wide	2-½ Filters Wide	3 Filters Wide	3-½ Filters Wide	4 Filters Wide	4-½ Filters Wide	5 Filters Wide	5-½ Filters Wide	6 Filters Wide	Housing Depth (inches)
½	15.25	-	1000	-	2000	-	3000	-	4000	-	5000	-	6000	33.75
1	27.25	1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000	12000	
1-½	39.50	-	3000	-	6000	-	9000	-	12000	-	15000	-	18000	
2	51.50	2000	4000	6000	8000	10000	12000	14000	16000	18000	20000	22000	24000	
2-½	63.75	-	5000	-	10000	-	15000	-	20000	-	25000	-	30000	
3	75.75	-	6000	9000	12000	15000	18000	21000	24000	27000	30000	33000	36000	
3-½	88.00	-	7000	-	14000	-	21000	-	28000	-	35000	-	42000	
4	100.00	-	8000	12000	16000	20000	24000	28000	32000	36000	40000	44000	48000	
	Width (inches)	12	24	36	48	60	72	84	96	108	120	132	144	

As part of our program for continuous improvement, Camfil reserves the right to change specifications without notice. 2018-04-20