


Bag Filters

Hi-Flo®

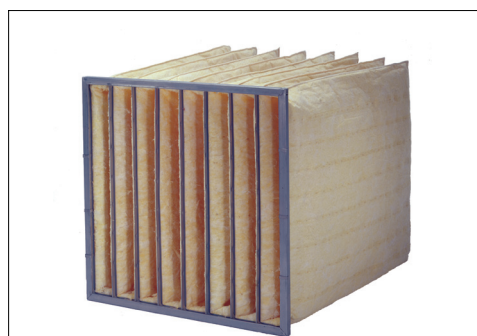

Advantages

- Longest lasting pocket style filter available in the industry
- Proprietary media, exclusive to Camfil, optimized for the highest dust holding capacity
- Controlled Media Spacing (CMS) for longer life
- Controlled Media Spacing (CMS) for longer life

**Description:** Multi-pocket high efficiency filters with tapered pleats and pocket stitching.

**Typical applications:** Built-up filter banks, rooftops, split systems, free-standing units, package systems and air handlers.

**Efficiency:** MERV 9, MERV 11, MERV 13, MERV 14 and MERV-A of 9, 11, 13, and 14 respectively.

**Media:** Microfine glass media in a uniform high loft media blanket with a synthetic micro mesh media backing.

**Recommended final pressure drop:** 1.0" w.g. when operated at 500 fpm. System design may dictate alternative changeout point

**Temperature:** Maximum continuous operating temperature of 158° F (70° C).

**Ratings:** ECI value of five stars, UL Class 2.

See Literature 1203 for more details.

Model Number HF, * insert MERV Efficiency	Number of Pockets	Nominal Size (H x W x D, inches)	Rated Airflow (cfm)	M14 Initial Resistance (inches w.g.)	M13 Initial Resistance (inches w.g.)	M11 Initial Resistance (inches w.g.)	M9 Initial Resistance (inches w.g.)	Media Area (sq. ft.)
*/24/24/32/12	12	24 x 24 x 32	2500	0.54	0.40	0.27	0.21	129
*/24/20/32/9	9	24 x 20 x 32	1875	0.54	0.40	0.27	0.21	97
*/24/12/32/6	6	24 x 12 x 32	1250	0.54	0.40	0.27	0.21	65
*/20/20/32/9	9	20 x 20 x 32	1575	0.54	0.40	0.27	0.21	81
*/24/24/15/12	12	24 x 24 x 15	1500	0.49	0.34	0.21	0.15	58
*/24/20/15/9	9	24 x 20 x 15	1100	0.49	0.34	0.21	0.15	44
*/24/12/15/6	6	24 x 12 x 15	750	0.49	0.34	0.21	0.15	29
*/20/20/15/9	9	20 x 20 x 15	950	0.49	0.34	0.21	0.15	37
*/24/24/30/10	10	24 x 24 x 30	2400	0.69	0.46	0.29	0.22	101
*/24/20/30/8	8	24 x 20 x 30	1900	0.69	0.46	0.29	0.22	81
*/24/12/30/5	5	24 x 12 x 30	1200	0.69	0.46	0.29	0.22	50
*/20/20/30/8	8	20 x 20 x 30	1625	0.69	0.46	0.29	0.22	68
*/24/24/22/10	10	24 x 24 x 22	1750	0.54	0.36	0.22	0.15	73
*/24/20/22/8	8	24 x 20 x 22	1400	0.54	0.36	0.22	0.15	58
*/24/12/22/5	5	24 x 12 x 22	875	0.54	0.36	0.22	0.15	36
*/20/20/22/8	8	20 x 20 x 22	1175	0.54	0.36	0.22	0.15	49
*/24/24/36/8	8	24 x 24 x 36	2400	0.69	0.46	0.29	0.22	97
*/24/20/36/7	7	24 x 20 x 36	1900	0.69	0.46	0.29	0.22	85
*/24/12/36/4	4	24 x 12 x 36	1200	0.69	0.46	0.29	0.22	49
*/20/20/36/7	7	20 x 20 x 36	1625	0.69	0.46	0.29	0.22	71
*/24/24/30/8	8	24 x 24 x 30	2000	0.6	0.40	0.25	0.18	81
*/24/20/30/7	7	24 x 20 x 30	1750	0.6	0.40	0.25	0.18	70
*/24/12/30/4	4	24 x 12 x 30	1000	0.6	0.40	0.25	0.18	40
*/20/20/30/7	7	20 x 20 x 30	1450	0.6	0.40	0.25	0.18	59
*/24/24/22/8	8	24 x 24 x 22	1750	0.57	0.38	0.24	0.17	58
*/24/20/22/7	7	24 x 20 x 22	1500	0.57	0.38	0.24	0.17	51

As part of our program for continuous improvement, Camfil reserves the right to change specifications without notice. 2018-04-20



**Bag Filters**

Model Number HF, * insert MERV Efficiency	Number of Pockets	Nominal Size (H x W x D, inches)	Rated Airflow (cfm)	M14 Initial Resistance (inches w.g.)	M13 Initial Resistance (inches w.g.)	M11 Initial Resistance (inches w.g.)	M9 Initial Resistance (inches w.g.)	Media Area (sq. ft.)
*/24/12/22/4	4	24 x 12 x 22	875	0.57	0.38	0.24	0.17	29
*/20/20/22/7	7	20 x 20 x 22	1300	0.57	0.38	0.24	0.17	43
*/24/24/36/6	6	24 x 24 x 36	1750	0.54	0.35	0.21	0.15	76
*/24/20/36/5	5	24 x 20 x 36	1500	0.54	0.35	0.21	0.15	63
*/24/12/36/3	3	24 x 12 x 36	875	0.54	0.35	0.21	0.15	38
*/20/20/36/5	5	20 x 20 x 36	1225	0.54	0.35	0.21	0.15	53
*/24/24/30/6	6	24 x 24 x 30	1750	0.56	0.37	0.23	0.16	63
*/24/20/30/5	5	24 x 20 x 30	1500	0.56	0.37	0.23	0.16	52
*/24/12/30/3	3	24 x 12 x 30	875	0.56	0.37	0.23	0.16	31
*/20/20/30/5	5	20 x 20 x 30	1225	0.56	0.37	0.23	0.16	44
*/24/24/22/6	6	24 x 24 x 22	1750	0.71	0.46	0.28	0.18	45
*/24/20/22/5	5	24 x 20 x 22	1500	0.71	0.46	0.28	0.18	38
*/24/12/22/3	3	24 x 12 x 22	875	0.71	0.46	0.28	0.18	23
*/20/20/22/5	5	20 x 20 x 22	1225	0.71	0.46	0.28	0.18	32

