Filtra 2000 GEL Absolute®

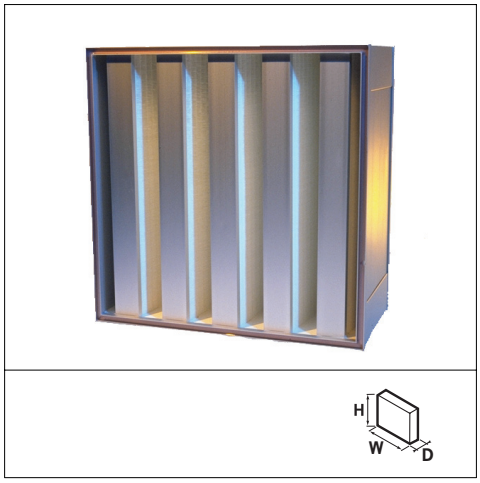

Advantages

- **High filter surface area offers low pressure drop for energy savings and longer life**
- **Airflow capabilities up to 2300 cfm with a low initial pressure drop**
- **Gel seal to ensure leak free performance when mounted to knife-edge mounting system**

Description: High capacity HEPA/ULPA grade filter in an anodized aluminum enclosing frame with gel seal track with elastic gel sealant. Versions available for standard industry mounting systems or specific to Camfil containment housings.
Typical applications: Built-up filter banks, rooftops, split systems, free-standing units, package systems and air handlers in medical facilities, pharmaceuticals, and clean process manufacturing.
Efficiency: 95% to 99.999% at 0.3µ.
Media: Microfine glass media formed into individual mini-pleat media packs and assembled into a V-bank filter configuration.
Recommended final pressure drop: Consult factory. Rule of thumb: change filter when the initial pressure drop doubles.
Temperature: Maximum continuous operating temperature of 155° F (68° C).
Ratings: Tested in accordance with IEST Recommended Practice for Testing HEPA Filters. UL 900.

See Literature 1823Gel for more details.

Model Number	Efficiency	Nominal Size (H x W x D, inches)	Airflow Capacity (cfm)	Resistance @ Airflow (inches w.g.)	Media Area (sq. ft.)	Shipping Weight (lbs.)
FA1575-03-01	95% @ 0.3 micron	24 x 12 x 11.50	864	0.50	162	22
FA1573-03-01	95% @ 0.3 micron	24 x 24 x 11.50	1437	0.50	221	26
FA1571-03-01	95% @ 0.3 micron	24 x 24 x 11.50	1908	0.50	363	35
FA1570-03-01	95% @ 0.3 micron	24 x 24 x 11.50	2294	0.80	401	40
FA1575-01-01	99.99% @ 0.3 micron	24 x 12 x 11.50	864	1.0	162	22
FA1573-01-01	99.99% @ 0.3 micron	24 x 24 x 11.50	1437	1.0	221	26
FA1571-01-01	99.99% @ 0.3 micron	24 x 24 x 11.50	1908	1.0	363	35
FA1570-01-01	99.99% @ 0.3 micron	24 x 24 x 11.50	2294	1.0	401	40
FA1575-02-01	99.999% @ 0.3 micron	24 x 12 x 11.50	665	1.0	162	22
FA1573-02-01	99.999% @ 0.3 micron	24 x 24 x 11.50	1106	1.0	221	26
FA1571-02-01	99.999% @ 0.3 micron	24 x 24 x 11.50	1469	1.0	363	35
FA1570-02-01	99.999% @ 0.3 micron	24 x 24 x 11.50	1766	1.0	401	40
FA1575A-01-01-**	99.99% @ 0.3 micron	24 x 12 x 11.50	800	1.0	152	22
FA1573A-01-01-**	99.99% @ 0.3 micron	24 x 24 x 11.50	1350	1.0	210	26
FA1571A-01-01-**	99.99% @ 0.3 micron	24 x 24 x 11.50	1790	1.0	345	35
FA1570A-01-01-**	99.99% @ 0.3 micron	24 x 24 x 11.50	2150	1.0	380	40
FA1575A-02-01-**	99.999% @ 0.3 micron	24 x 12 x 11.50	620	1.0	152	22
FA1573A-02-01-**	99.999% @ 0.3 micron	24 x 24 x 11.50	1000	1.0	210	26
FA1571A-02-01-**	99.999% @ 0.3 micron	24 x 24 x 11.50	1380	1.0	345	35
FA1570A-02-01-**	99.999% @ 0.3 micron	24 x 24 x 11.50	1625	1.0	380	40

*Replace ** in model number with 00f or no extraction clips or 09 to include extraction clips.*

As part of our program for continuous improvement, Camfil reserves the right to change specifications without notice. 2018-04-20

Conover NC, Corcoran CA, Crystal Lake IL, Riverdale NJ,
Washington NC, Concord Ontario
United States Tel: (866) 422-6345, Canada Tel: (800) 976-9382
www.camfil.com