


# E-PTFE Megalam®

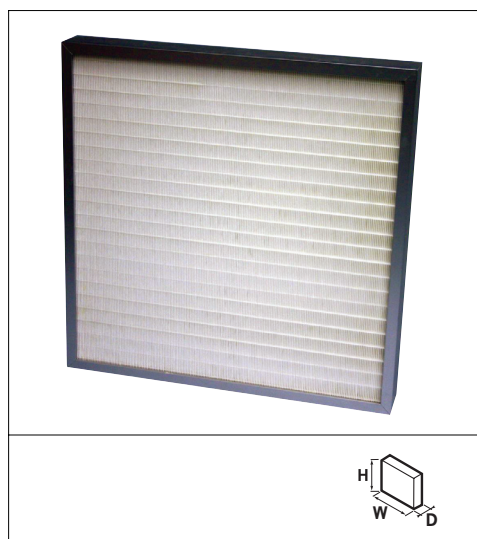

## Advantages

- Low outgassing, chemically compatible ULPA filter
- Media has very high mechanical strength and is resistant to tearing and hostile environments

**Description:** Low outgassing, chemically compatible ULPA grade filter available with gasket, gel or knife-edge seal.

**Typical applications:** Hostile environments, chemical processing, pharmaceuticals and other clean process applications.

**Efficiency:** 99.99995% at most penetrating particle size (MPPS).

**Media:** Durable, chemically resistant, hydrophobic polytetrafluoroethylene media formed into a mini-pleat filter pack using exclusive Camfil Closepleat manufacturing technology.

**Recommended final pressure drop:** Consult factory. Rule of thumb: change filter when the initial pressure drop doubles.

**Temperature:** Maximum continuous operating temperature of 150° F (66° C).

**Ratings:** Tested in accordance with IEST Recommended Practice for Testing ULPA Filters. Rated by Underwriters Laboratories as UL 900.

See Literature 3219 for more details.

Model	Size (inches)	Efficiency @ MPPS	Pressure Drop @ 100 fpm (inches w.g.)	Shipping Weight (lbs.)
<b>Frame Type: Gasket Seal (3.00" overall depth, 76 mm ) Pleat Depth 1.77" (45 mm)</b>				
S2-12.00-24.00-1-03-00-00-00-0	12.00 x 24.00	99.99995%	0.48	12
S2-24.00-24.00-1-03-00-00-00-0	24.00 x 24.00	99.99995%	0.48	16
S2-24.00-36.00-1-03-00-00-00-0	24.00 x 36.00	99.99995%	0.48	23
S2-24.00-48.00-1-03-00-00-00-0	24.00 x 48.00	99.99995%	0.48	29
S2-24.00-60.00-1-03-00-00-10-0	24.00 x 60.00	99.99995%	0.48	38
S2-24.00-72.00-1-03-00-00-10-0	24.00 x 72.00	99.99995%	0.48	44
S2-30.00-36.00-1-03-00-00-00-0	30.00 x 36.00	99.99995%	0.48	27
S2-30.00-48.00-1-03-00-00-10-0	30.00 x 48.00	99.99995%	0.48	38
S2-30.00-60.00-1-03-00-00-10-0	30.00 x 60.00	99.99995%	0.48	45
S2-30.00-72.00-1-03-00-00-10-0	30.00 x 72.00	99.99995%	0.48	52
S2-36.00-36.00-1-03-00-00-10-0	36.00 x 36.00	99.99995%	0.48	35
S2-36.00-48.00-1-03-00-00-00-0	36.00 x 48.00	99.99995%	0.48	44
S2-36.00-60.00-1-03-00-00-00-0	36.00 x 60.00	99.99995%	0.48	52
<b>Frame Type: Gasket Seal (3.54" overall depth, 90mm ) Pleat Depth 2.68" (68 mm)</b>				
S2-12.00-24.00-2-14-00-00-00-0	12.00 x 24.00	99.99995%	0.37	12
S2-24.00-24.00-2-14-00-00-00-0	24.00 x 24.00	99.99995%	0.37	16
S2-24.00-36.00-2-14-00-00-00-0	24.00 x 36.00	99.99995%	0.37	23
S2-24.00-48.00-2-14-00-00-00-0	24.00 x 48.00	99.99995%	0.37	29
S2-24.00-60.00-2-14-00-00-30-0	24.00 x 60.00	99.99995%	0.37	38
S2-24.00-72.00-2-14-00-00-30-0	24.00 x 72.00	99.99995%	0.37	44
S2-30.00-36.00-2-14-00-00-00-0	30.00 x 36.00	99.99995%	0.37	27
S2-30.00-48.00-2-14-00-00-30-0	30.00 x 48.00	99.99995%	0.37	38
S2-30.00-60.00-2-14-00-00-30-0	30.00 x 60.00	99.99995%	0.37	45
S2-30.00-72.00-2-14-00-00-30-0	30.00 x 72.00	99.99995%	0.37	52
S2-36.00-36.00-2-14-00-00-30-0	36.00 x 36.00	99.99995%	0.37	35
S2-36.00-48.00-2-14-00-00-30-0	36.00 x 48.00	99.99995%	0.37	44
S2-36.00-60.00-2-14-00-00-30-0	36.00 x 60.00	99.99995%	0.37	52

As part of our program for continuous improvement, Camfil reserves the right to change specifications without notice. 2018-04-20